Telefon: 02173-2027007
Email: info@net4web.de

Albrecht-Dürer-Str. 6
D-40764 Langenfeld

XT-90E-M Stecker von AMASS® für Gehäusemontage

Marke: Amass®
Produktcode: 0711906114202
Verfügbar: 22

Preis: 3,36€

Ohne Steuer: 2,82€

Kurzbeschreibung

XT-90E-M Stecker von AMASS®, für den Hochstromeinsatz im Modellbau. XT-90E-M connector from AMASS®, for high-current use in model building.

Beschreibung

Neues Modell!

Der XT-90 Stecker von AMASS® ist für den Hochstromeinsatz vor allem im Modellbau ausgelegt. Mit dem Stecker können z.B. sichere und stabile Akku-Anschlüsse in Gehäusen realisiert werden. Das macht den Umgang mit Lipos ein Stückchen sicherer. Für die Kabelverbindungen empfehlen wir Querschnitte von AWG 8 (8,4qmm-60A), AWG 10 (5,3qmm-45A) oder AWG 12 (3,3qmm-35A) je nach Stromfluss.

Die genauen Maße entnehmen Sie bitte den Fotos.

AMASS® ist bekannt als Hersteller sehr hochwertiger XT-90 Steckverbinder.

Technische Daten:

Breite: 42mm

Höhe: 15,1mm

Tiefe: 22,8mm (inkl. Lötanschlüssen)

Lochabstand: 32mm

Gewicht: ca. 9,5g

Farbe/Material: schwarz PA-Nylon

Kontakte: Kupferkern, vergoldet

RoHS-Konform: Ja

Kontaktwiderstand: 0,4m?

Isolationswiderstand: 2000M?

Flammfestigkeit: UL94 V0

Nennspannung: max. DC 500V

Nennstrom: max. 30A

Spitzenstrom: max. 60A für 1 Minute

Steckzyklen: 100mal

Lagertemperatur: -20°C bis +120°C

Lieferumfang:

1 Stück XT-90E-M Einbaustecker (vergoldete Kontakte) mit Lötanschluss

Achten Sie beim Zusammenbau Ihrer Komponenten auf die korrekte Polung und auf einen ausreichenden Kabelquerschnitt.

Diese Steckverbinder werden im Internet teilweise mit völlig falschen und daher

sehr gefährlichen Angaben bezüglich der Ströme angegeben.

Ebenso wird häufig die Lagertemperatur fälschlicherweise als Betriebstemperatur angegeben.

Alle angegebenen Maße sind ca.-Maße und können geringfügig abweichen.

WEEE-Registrierungsnummer: DE33880481

English
New model!

The XT-90 connector from AMASS® is designed for high-current use, especially in model making. With the plug, for example, safe and stable battery connections can be implemented in housings. This makes handling lipos a bit safer. For the cable connections we recommend cross-sections of AWG 8 (8.4mm2-60A), AWG 10 (5.3mm2-45A) or AWG 12 (3.3mm2-35A) depending on the current flow.

Please refer to the photos for the exact dimensions.

AMASS® is known as a manufacturer of very high quality XT-90 connectors.

Technical specifications:

Width: 42mm

Height: 15.1mm

Depth: 22.8mm (including solder terminals)

Hole spacing: 32mm

Weight: about 8g

Color/material: black PA nylon

Contacts: copper core, gold plated

RoHS Compliant: Yes

Contact resistance: 0.4m?

Insulation resistance: 2000M?

Flame resistance: UL94 V0

Rated voltage: max. DC 500V

Rated current: 30A max

Peak current: max. 60A for 1 minute

Mating cycles: 100 times

Storage temperature: -20°C to +120°C

Scope of delivery:

1 x XT-90E-M chassis connector (gold-plated contacts) with solder connection

When assembling your components, pay attention to the correct polarity and a sufficient cable cross-section.

Some of these connectors are given on the Internet with completely incorrect and therefore very dangerous information regarding the currents.

Likewise, the storage temperature is often incorrectly specified as the operating temperature.

All dimensions given are approximate and may vary slightly.

WEEE-Registernumber: DE33880481
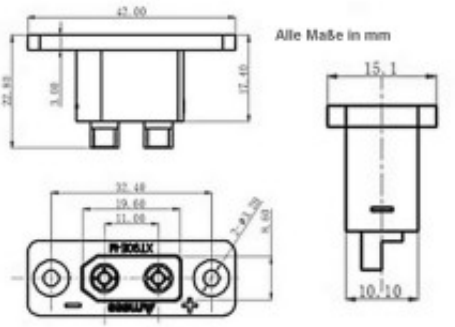
Produkt Gallerie